


■ MATERIAL  
 ◆ Insulator: PA66 , UL94-V2

RoHS  
Compliant

Poles	DIM.A	DIM.B	DIM.C
2P	1.25	2.95	4.25
3P	2.50	4.20	5.50
4P	3.75	5.45	6.75
5P	5.00	6.70	8.00
6P	6.25	7.95	9.25
7P	7.50	9.20	10.50
8P	8.75	10.45	11.75
9P	10.00	11.70	13.00
10P	11.25	12.95	14.25
11P	12.50	14.20	15.50
12P	13.75	15.45	16.75
13P	15.00	16.70	18.00
14P	16.25	17.95	19.25
15P	17.50	19.20	20.50
16P	18.75	20.45	21.75

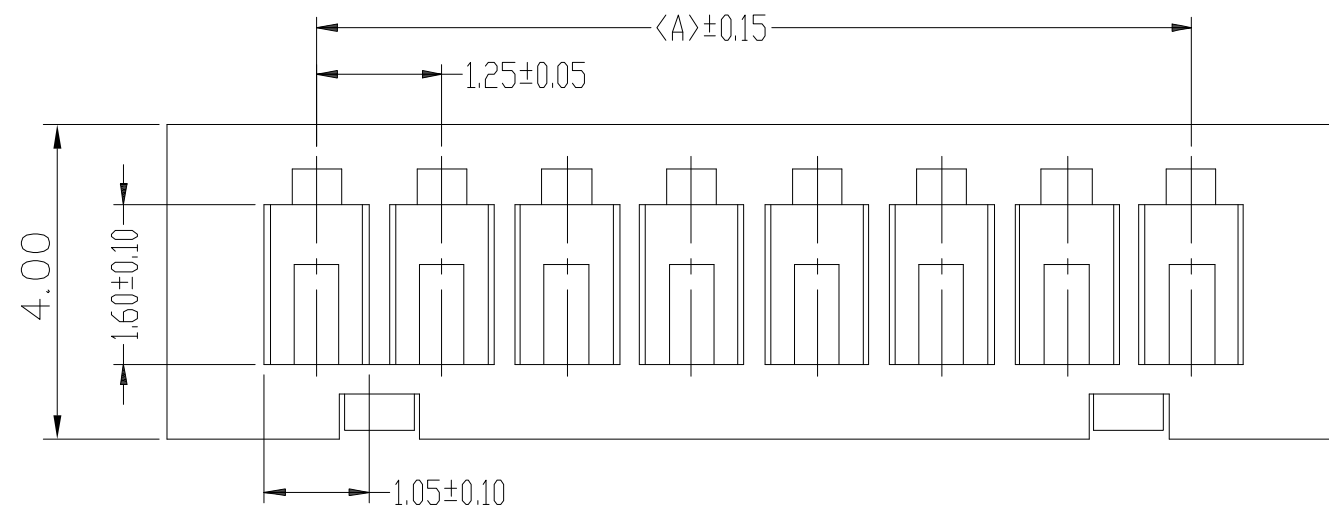

**Ordering Information**

**HE - XX - LAH2-1-369**

1.25Ph Housing    02~16Pin

Packing  
1: Bag

REV.	REVISION RECORD	DATE	General Tolerance	
A	Original	04/15/22	LINEAR	0.0 ±0.25
				ANGLE ±3°
				0.00 ±0.20
			UNIT: mm	
			A4	NAME
			APPROVED	KENNY
			DESIGNER	GRACE
			DRAWN	LANDA

**ARIBA**  
TECHNOLOGY CO., LTD.

TITLE: **1.25 Pitch Housing 4.0L**

DWG.NO: **HEXXLAH21-369**    REV. A

SCALE    1 : 1    SHEET    1 OF 1